



Lithium Battery CR 1616 Data-Sheet



Designation IEC: **CR1616**

Nominal voltage: **3V**

Designed capacity: **55 mAh**

Typical capacity: **50 mAh**
(load 47kΩ down to 2.0V at 20°C)

Weight: **1.1 g**


Dimensions: **16 x 1.6 mm**

Temperature ranges:
long-term storage: 0..40°C
application/discharge: -20..60°C

load: 47KΩ

Discharge characteristics (load 47 kΩ):

end-point voltage: 2.0V

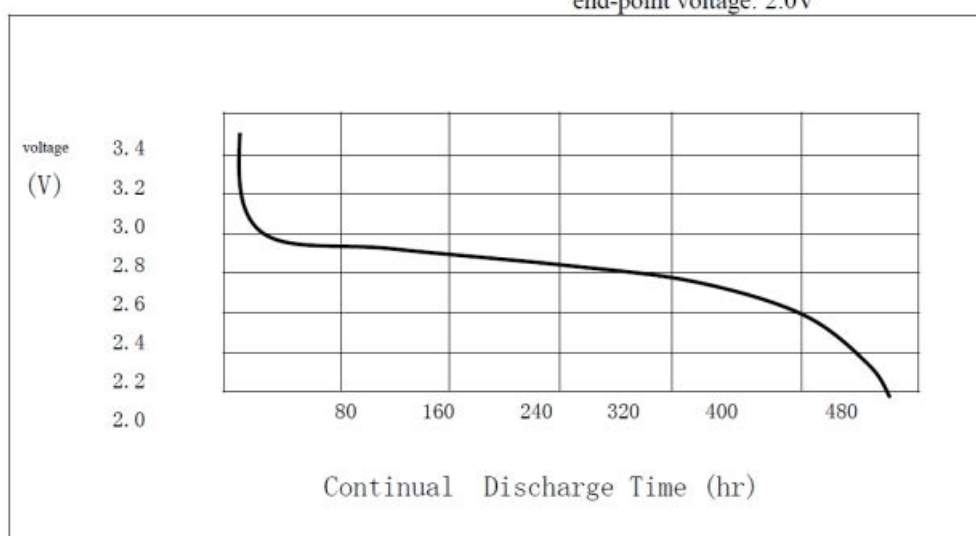

Baltrade sp. z o.o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
contact@baltrade.eu



Place, date of issue: Gdansk, 04.02.2025