



Lithium Battery CR2450 Data-Sheet



Designation IEC: **CR2450**

Nominal voltage: **3V**

Designed capacity: **630 mAh**


Typical capacity: **600 mAh**
(load 7.5Ω down to 2.0V at 20°C)

Weight: **4.2 g**

Dimensions (max): **24.5 x 5.0 mm**

Temperature ranges: **long-term storage: ..40°C**
application/discharge: -20..60°C

load: 7.5KΩ Discharge characteristics (load 7,5 kΩ): end-point voltage: 2.0V

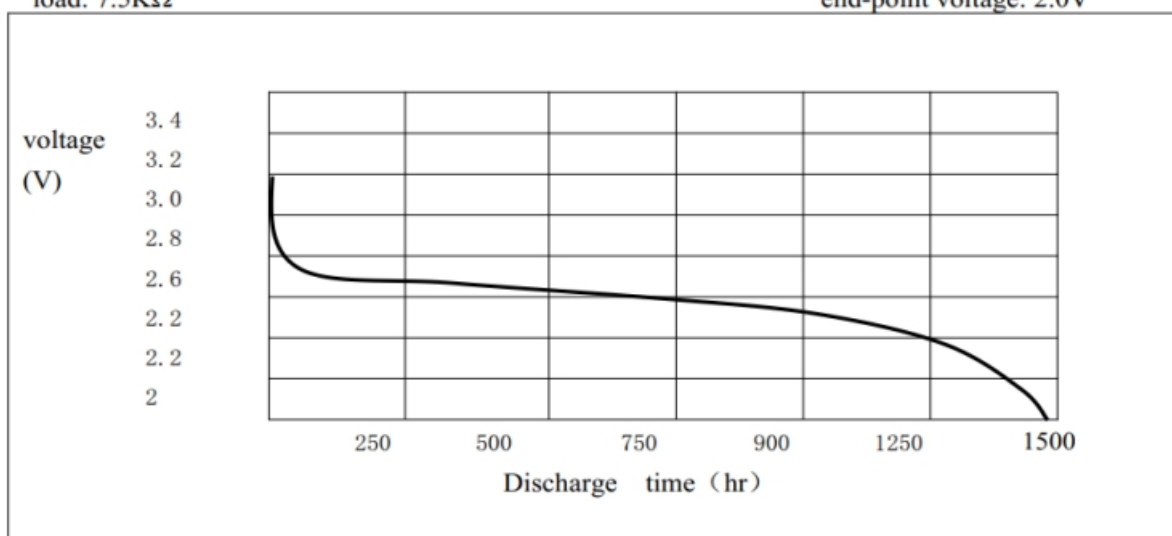

Baltrade sp. z o.o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
contact@baltrade.eu



Place, date of issue: Gdansk, 04.02.2025