




'Pro Alkaline' High Performance Battery 6LR61 9V

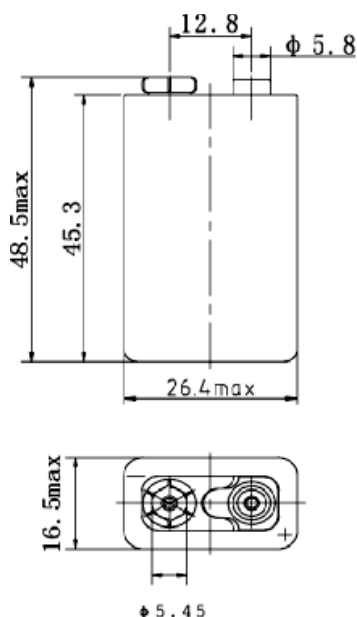

Designation IEC: **6LR61**

Nominal voltage: **9V**

Designed capacity: **650 mAh**
(discharge with high resistance)

Internal impedance: **1800Ω @ 1kHz**

Shelf life: **5 years**

Weight: **46 g**

Dimensions (max): **16.5x 48.5 mm**

temperature ranges: **long-term storage: 10..25°C**
application/discharge: -20..60°C

Approved standards: **GB/T 8897.2,**
GB 8897.5, IEC 60086-1,
IEC 60086-2, IEC 60086-3, IEC 60086-5

Typical service output (new battery, at 25°C):

Load	Conditions	End Voltage	Time
270Ω	1 h/d	5.4V	20 h
620Ω	2 h/d	5.4V	52 h
3.9Ω background 0.62kΩ pulse: 1s on, 3599s off	24 h/d	7.5V	24 d

Baltrade sp. z o.o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
contact@baltrade.eu



Place, date of issue: Gdansk, 04.02.2025